

SCISSOR LIFT

Slab | Electric drive motor

FS0812E

STANDARD FEATURES

- Emergency stop
- Automatic pothole guard
- Emergency lowering
- Overload protection
- Descent protection alarm
- Tilt level sensor
- Safety arm
- Motion alarm
- Dual flashing beacons
- Horn
- Drive at full height
- Non-marking tyres
- Forklift pockets
- Hour meter
- Automatic braking system
- Fault diagnosis system
- Half height swing gate
- Dual voltage self protecting charger
- Proportional control
- Foldable guardrails
- Manual brake release
- Self lubricating bearings

OPTIONS

- AC power on platform
- Customize color


HIGHLIGHTS

- Standardized parts ensure lower inventory costs
- Powerfully green. Effortlessly efficient
- Ultra user friendly with smooth and solid performance
- Precise controls
- Wide fork pockets for superior stability



Slab | Electric drive motor

Model: FS0812E		
NO.	Dimensions	Performance parameter
1	Max. Working Height	9.9 m
2	A Max. Platform Height	7.9 m
3	B Overall Length (Stowed)	2.45 m
4	C Overall Width	1.18 m
5	D Overall Height (Guardrails unfolded)	2.31 m
6	Overall Height (Guardrails folded)	1.8 m
7	Platform Length (Stowed)	2.25 m
8	Max Horizontal Reach (Extension)	0.9 m
9	Platform Width	1.16 m
10	Wheelbase	1.85 m
11	Ground Clearance (Stowed)	0.1 m
12	Ground Clearance When Elevated	0.02 m
Weight		
13	Overall Weight	2400kg
Performance		
14	Max. Platform Occupancy (Indoor)	2
15	Max. Platform Occupancy (Outdoor)	1
16	Maximum Wind Speed	28mph/12.5m/s
17	Lift Capacity	460kg
18	Lift Capacity (Extension deck)	120kg
19	Drive Height	Full height
20	Drive speed (Stowed)	0-3.2km/h
21	Drive speed (Raised)	0-0.8km/h
22	Gradeability	30%
23	Turning Radius (Inside)	0.95m
24	Turning Radius (Outside)	2.45m
25	Maximum Working Inclination Angle	1.5°/3°
26	Rise/Lower Speed	55/51 s
27	Tyre Size	38×13cm
Power		
28	Lead-acid battery voltage / capacity	4×6V/220Ah
29	Lithium battery voltage / capacity	24V/180Ah
30	Charger	24V/36A

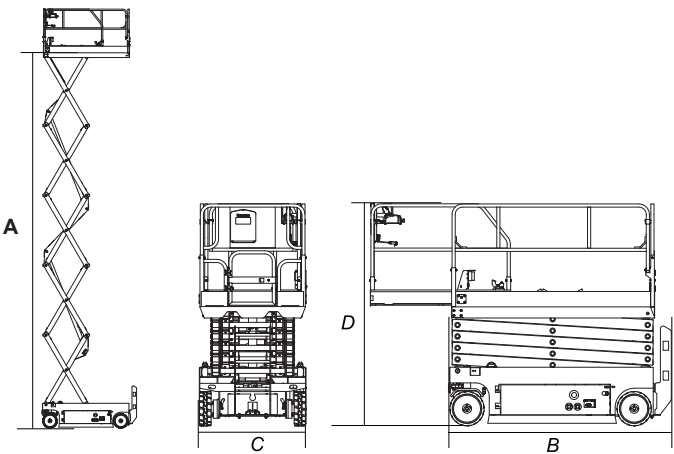

FRONTEQ(CHANGZHOU) MACHINERY CO., LTD.

🏠 NO.216 Donghai road, Xinbei district, Changzhou city, Jiangsu, China

✉ Sales@fronteqlift.com

🌐 www.fronteqlift.com

Fronteq(Changzhou) Machinery Co., Ltd. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure or discontinue individual models. The configuration of equipment, delivered may differ slightly from those in the brochure.

Lifting your trust.